


### **HEADBOARD & FOOTBOARD**


## **ASSEMBLY INSTRUCTIONS**

Before assembling your headboard, please read through these instructions carefully and familiarize yourself with the different parts.






#### **PARTS LIST**




Instructions apply for bed sizes **FULL > QUEEN** 

**HARDWARE** 

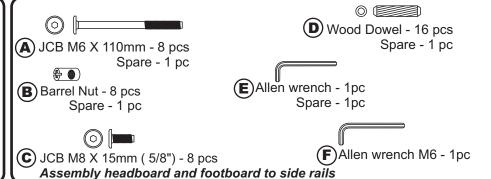

NOTE: WE INCLUDE SPARE HARDWARE IN CASE DAMAGE OCCURS DURING ASSEMBLY.


Step 1 Insert all wooden dowels (D) into the locator holes on (4)(5)(6)(10) and(11) as shown below.

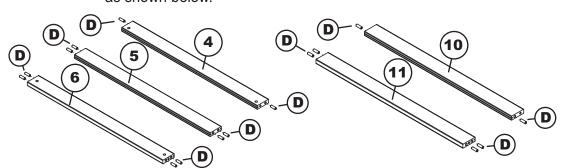







Lay the left post (2) bracket face down on smooth surface. Connect HB top rail (4), Step 2 mid rail (5) and HB bottom rail (6) as shown below, using JCB M6 X 110mm (A) and barrel nut (B). Tighten with the Allen wrench (E).

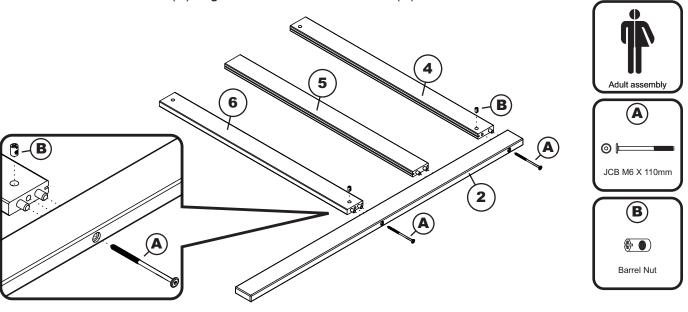


CODE **ITEM ITEM** PO: G-12913X G-12914X HBFB-ISL-NOHO

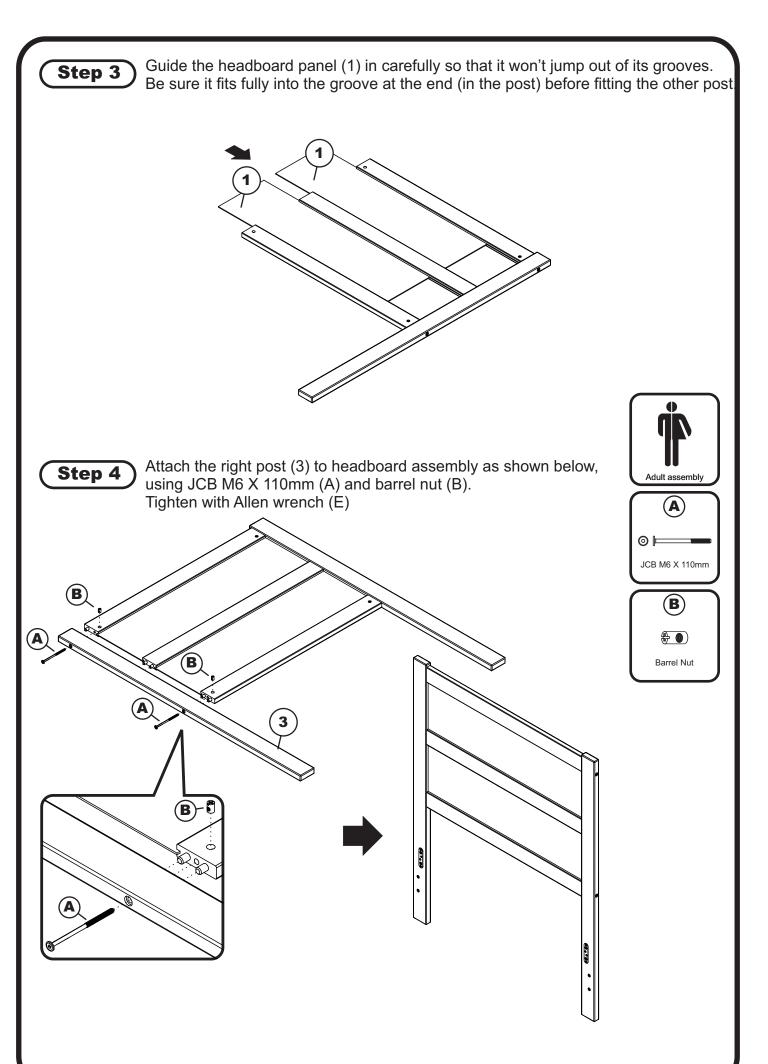


Lay the left leg (8) bracket face up on smooth surface. Connect FB top rail (10) and FB bottom rail (11) as shown below, using JCB M6 X 110mm (A) and barrel nut (B). Tighten with the Allen wrench (E).

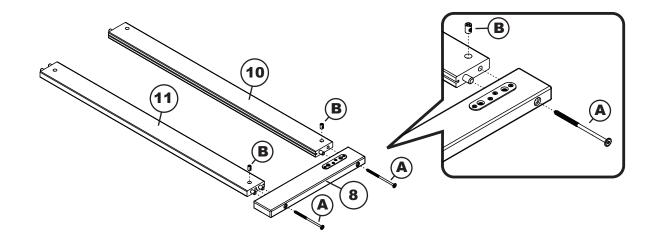



Step 6 Guide the footboard panel (7) in carefully so that it won't jump out of its grooves. Be sure it fits fully into the groove at the end (in the leg) before fitting the other leg.

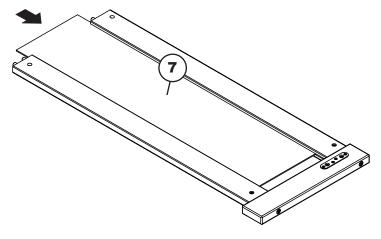


Step 7 Attach the right leg (9) to footboard assembly as shown below, using JCB M6 X 110mm (A) and barrel nut (B). Tighten with Allen wrench (E)

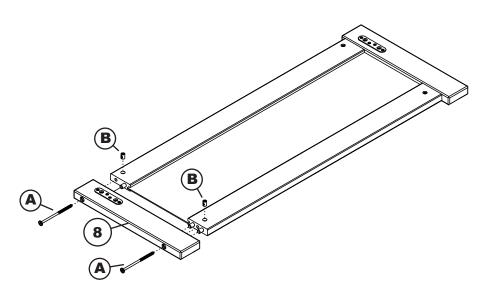



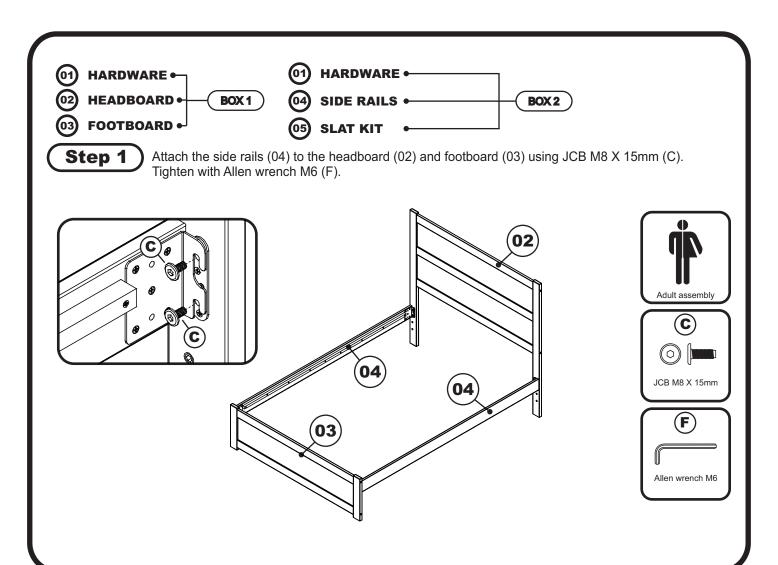

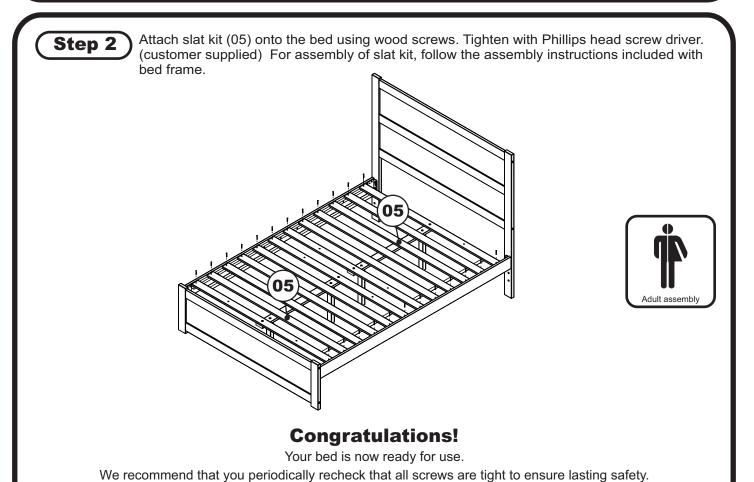



## **OPEN BED FRAME**

## QUEEN

#### ASSEMBLY INSTRUCTIONS




Before assembling your bed frame, please read through these instructions carefully and familiarize yourself with the different parts.

ATTENTION! If you receive a damaged or defective item, please contact afifurnishings at customerservice@afifurnishings.com or 1-800-955-3726

#### **PARTS LIST**

- **FOOT RAIL** 1 PC **LEFT LEG** 1 PC
- **RIGHT LEG** 1 PC
- 2 PCS **SIDE RAILS SLAT KIT** 2 SETS
- **SLAT SUPPORT 1** 1 PC
- **SLAT SUPPORT 2** 1 PC
- **SUPPORT LEGS** 3 PCS

## **HARDWARE**




- **(C)** JCB M8 X 15mm ( 5/8") 4 pcs
- (J) Split washer 3pcs Spare - 1pc **(D)** Wood screw(1 1/4") - 29 pcs
  - Spare 2 pcs
- (K) Flat washer 3pcs Spare 1pc

NOTE: WE INCLUDE SPARE HARDWARE IN CASE DAMAGE OCCURS DURING ASSEMBLY.

# Step 1


Attach the legs (2) and (3) to foot rail (1), using JCB M6 X 110mm (A) and barrel nut (B).

Tighten with the Allen wrench M4 (I).






Spare - 1pc





# Step 2

Attach side rails (4) to the foot rail (1) as shown below using JCB M8 X 15mm (C). Tighten with Allen wrench M6 (H).

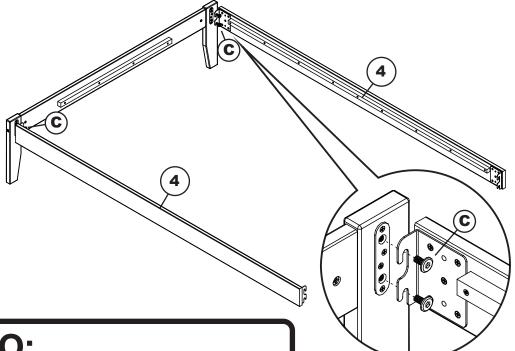





# **OPEN BED FRAME**

## **QUEEN**

(K)

Split, Flat washer

G

JCB M8 X 40mm


# Step 3


Attach open bed frame to the headboard as shown below using 4 JCB M8 X 15mm bolts that are supplied with your headboard.

Tighten with the Allen wrench M6 (H).

# Step 4

Attach support legs (8) to slat support 1 & 2 (6)(7) as shown below. Using JCB (G) split and flat washer (J)(K) tighten with Allen wrench M6 (H).




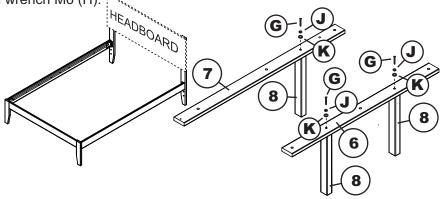



Step 5

(2 legs at headboard section.)

Attach slat support 1(6) and slat support 2 (7) to the slat kit (5) as shown below using JCB M6 X 30mm (E) and cap nut (F). Tighten with Allen wrench M4 (I).



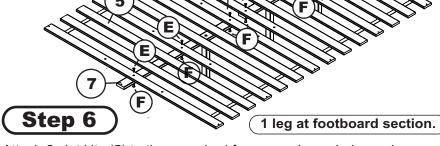




JCB M6 X 30mm



Attach 2 slat kits (5) to the open bed frame as shown below using wood screws 1 1/4" (D). Tighten with Phillips head screw driver. (customer supplied)

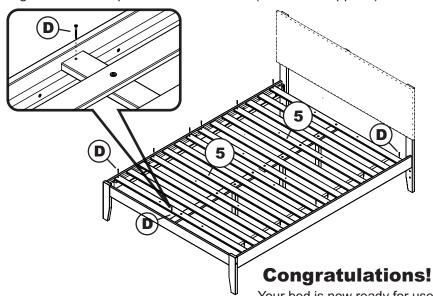



Your bed is now ready for use.

We recommend that you periodically recheck that all screws are tight to ensure lasting safety.