DC 6311-00

2.0hr




FLOOR AREA 2.0M X 1.5M

REQUIRED ASSEMBLY SPACE

APPROXIMATE ASSEMBLY TIME












ASSEMBLED DIMENSIONS

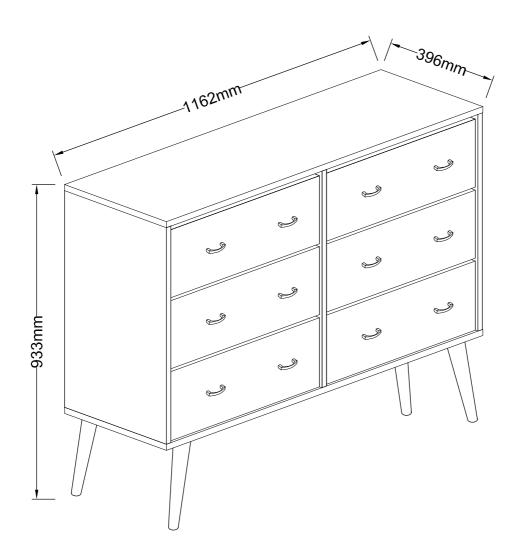

NOTE: THE MAXIMUM WEIGHT THIS PRODUCT CAN HOLD UP TO 25 KGS.

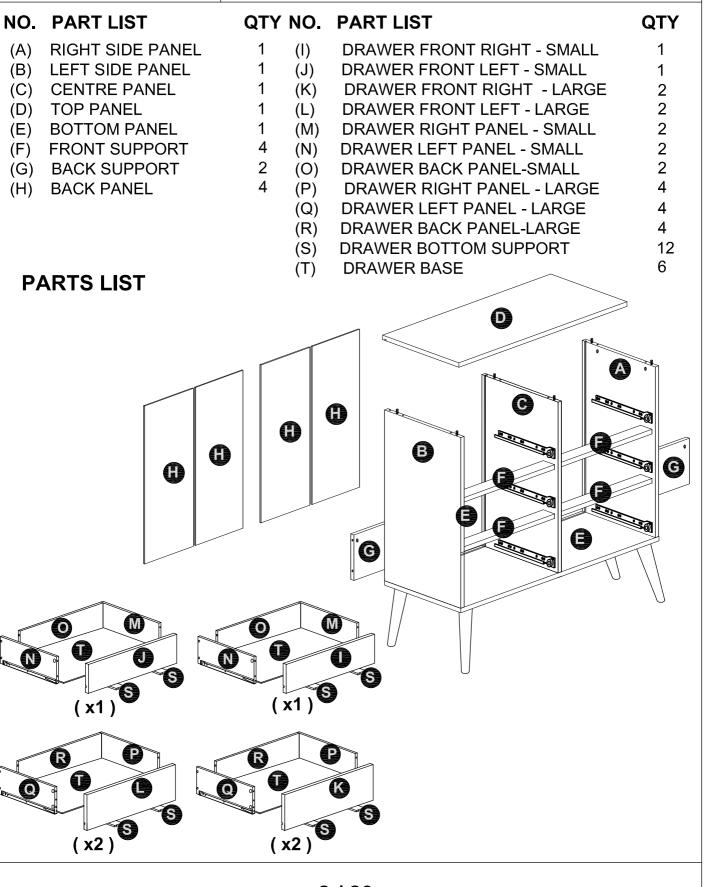

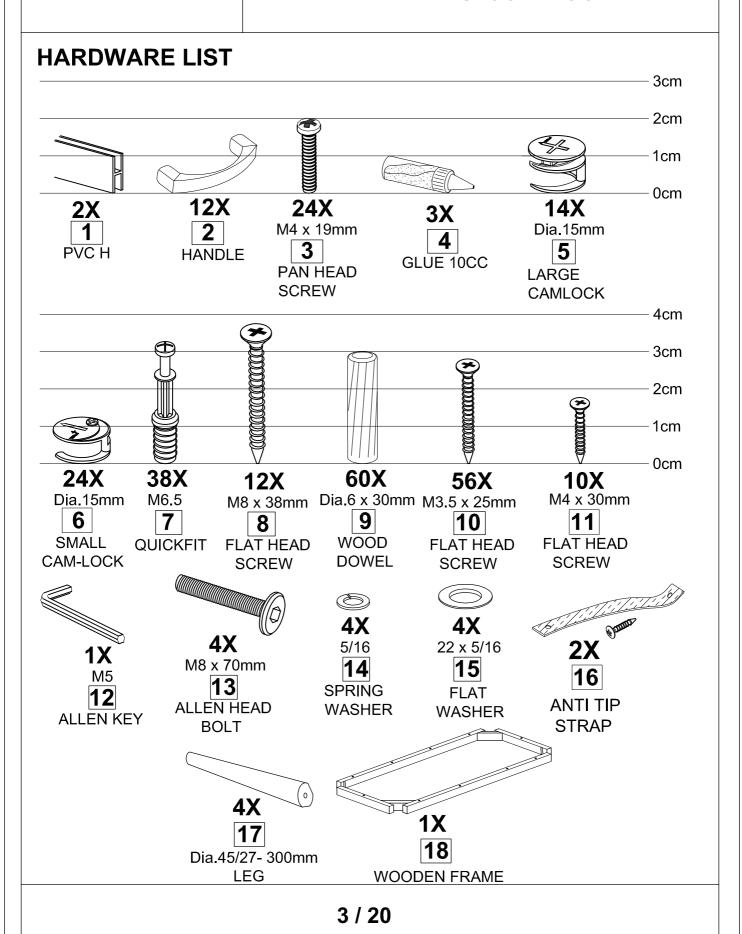

DC 6311-00

Top Tips before you start!

- 1. Please check that all parts are present before you start the assembly of your furniture.
- 2. For ease and speed of assembly, we recommend that before you commence each step of the assembly, that you identify all the parts required for that step.
- 3. For larger items, please ensure that you have sufficent space and people (as indicated on page 1) to assemble your product safely
- 4. We recommend that, where possible, all items are assembled near to the area in which they will be placed in use, to avoid moving the product unnecessarily once assembled.
- 5. For the protection of your furniture, particularly items of high gloss finish, we recommend that the product is placed on a protected surface during assembly to prevent any damage.
- 6. Caution Electric / Battery operated screw driver NOT RECOMMENDED.
- 7. During assembly please take care not to over-tighten any fittings, as this may damage the product.
- 8. Always place the product on a flat, steady and stable surface.
- 9. Do not sit or stand on the product.

 Do not use the product as a stepladder.
- 10. This product is intended for indoor, household use only as it is non industrial product.
- 11. This product is constructed from re-inforced hollow board. Excessive pressure cause irreparable damage. Please do not kneel on any part of this product during assembly.

Care and Maintenance of your Furniture

- Please periodically check all fittings and re-tighten as necessary.
- To clean your item, please use a damp cloth and wipe clean.
- Never allow any kind of liquid to remain on your furniture.
- Please do not place hot items (e.g. hot drinks) directly on to the wood surface.
- Please do not drag and pull your furniture.

DC 6311-00

SPECIAL TIPS FOR FITTING CAM-LOCKS

AND QUICKFIT

LARGE CAM-LOCK



WHEN FITTING CAMLOCK ENSURE STARTING POSITION IS CORRECT BEFORE YOU INSERT CONNECTING QUICKFIT TURN CLOCKWISE UNTIL SECURE

















Quickfit head needs to be in centre

SMALL CAM-LOCK




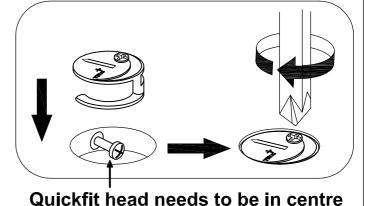

QUICKFIT


Tighten until shoulder is flush with panel. Do not overtighten or undertighten (see example







Panel


Panel

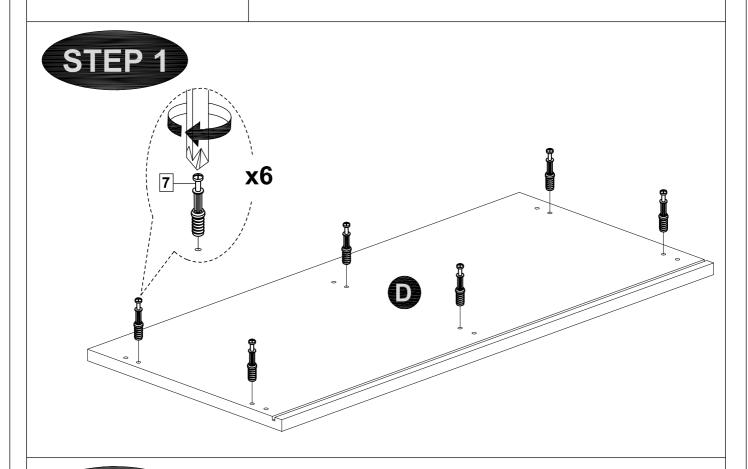





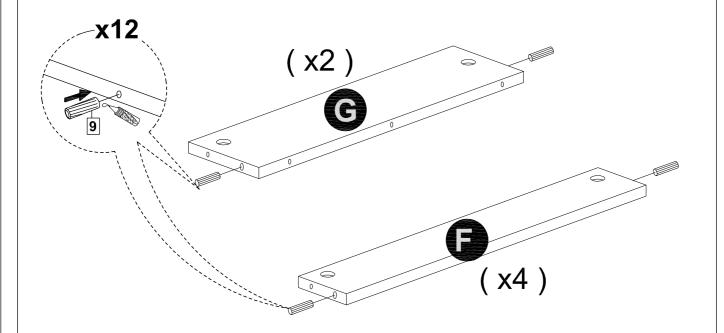


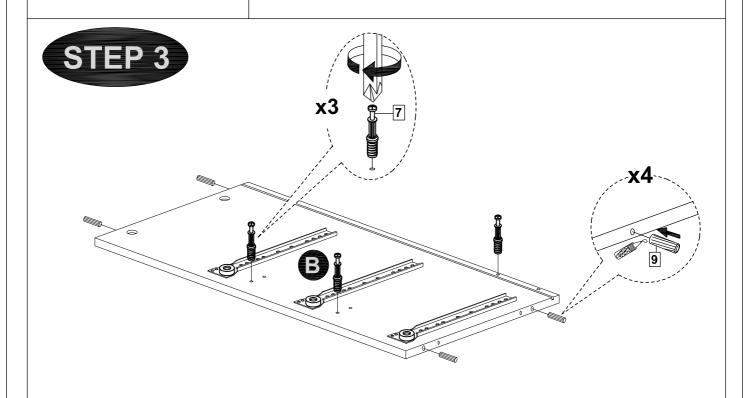


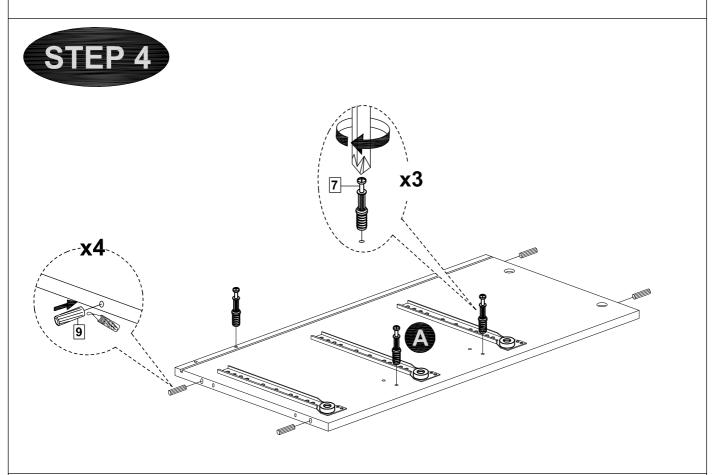


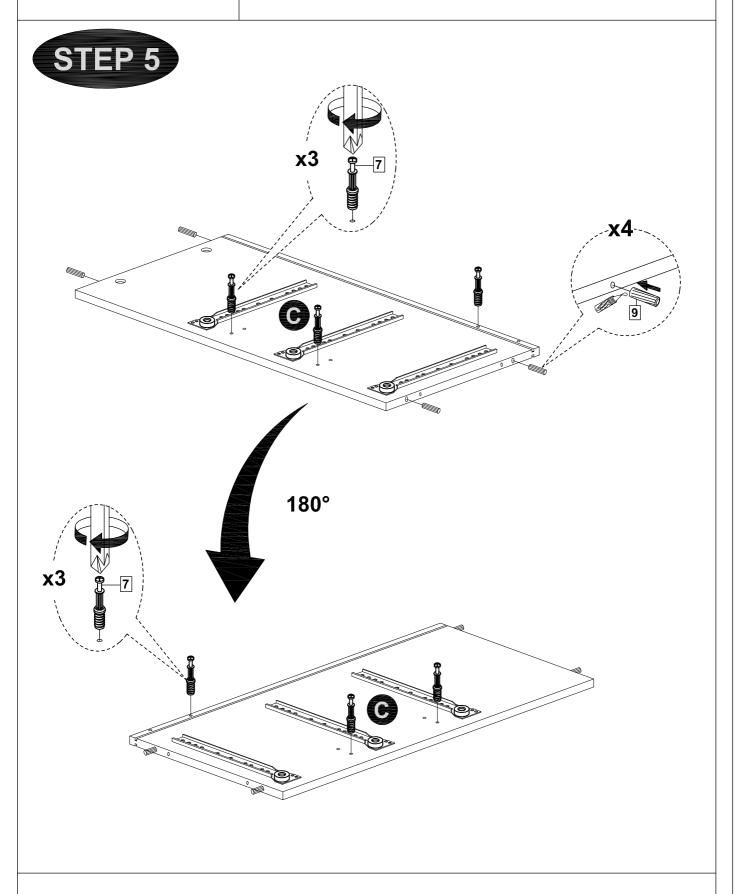

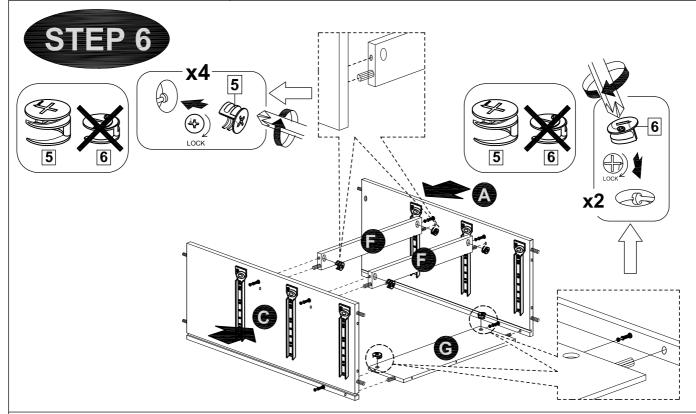


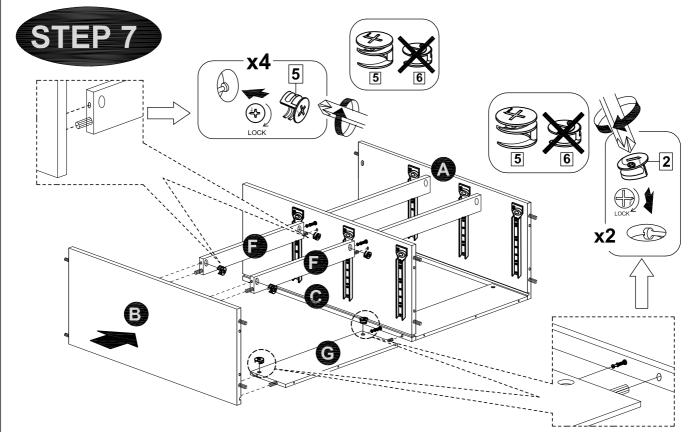


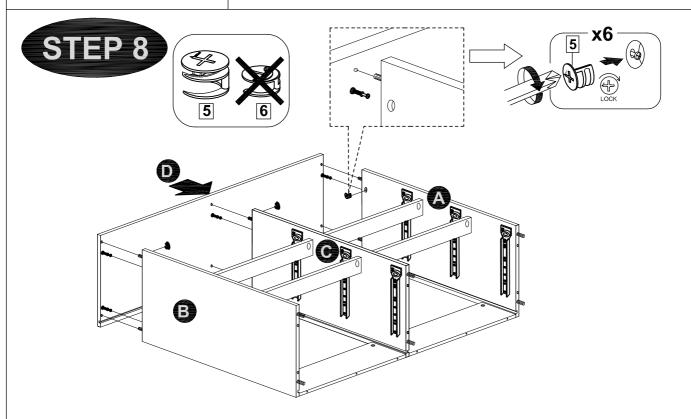

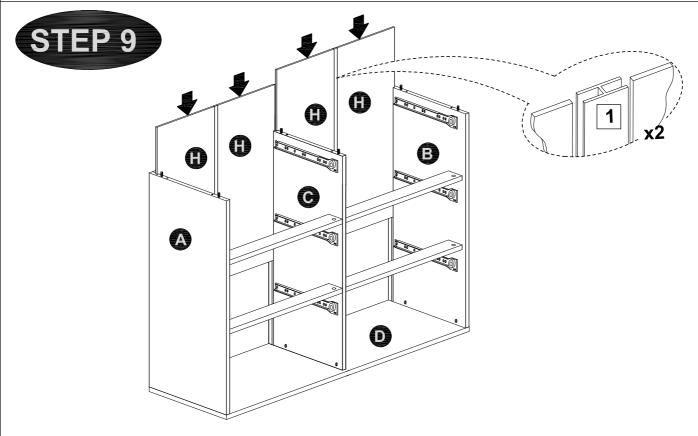





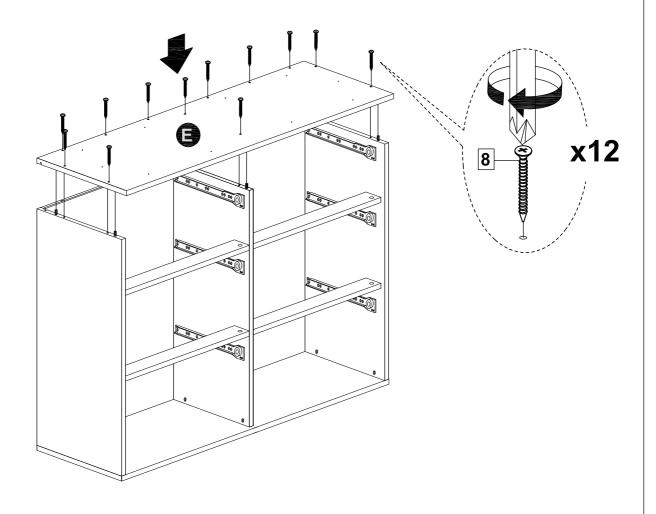


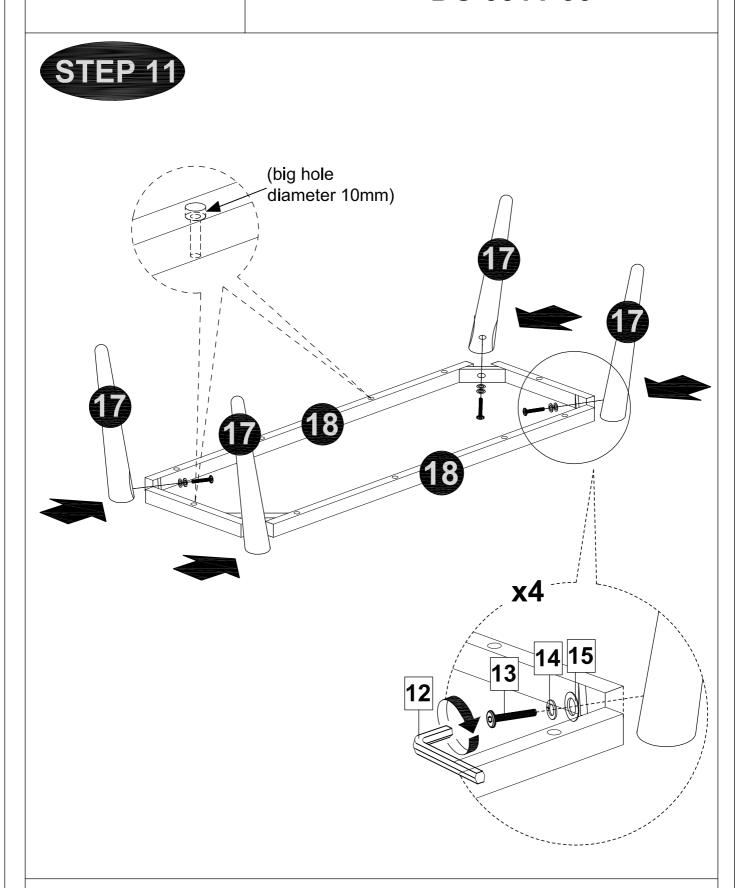





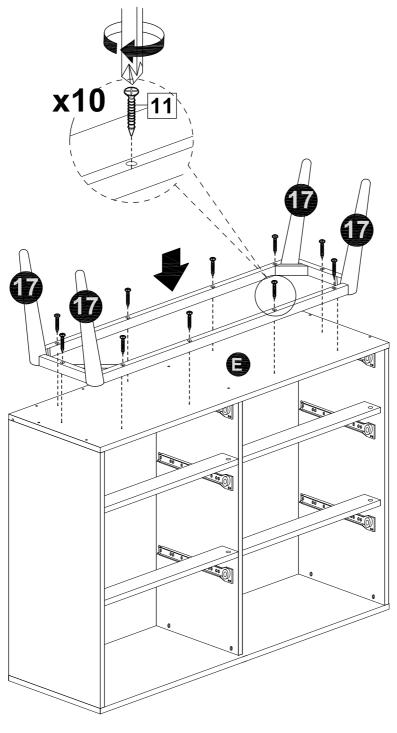


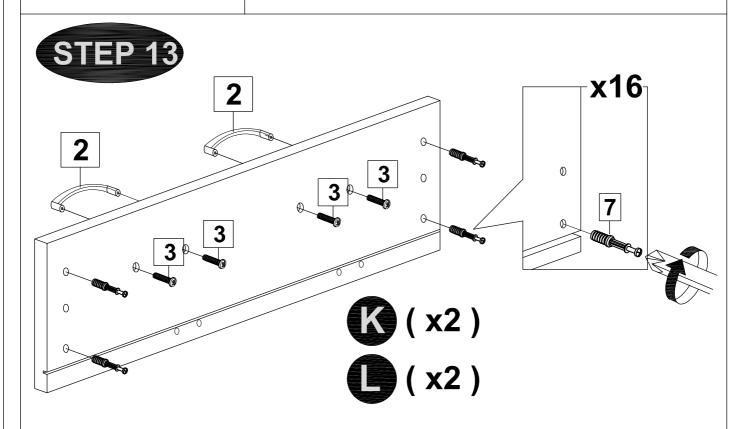


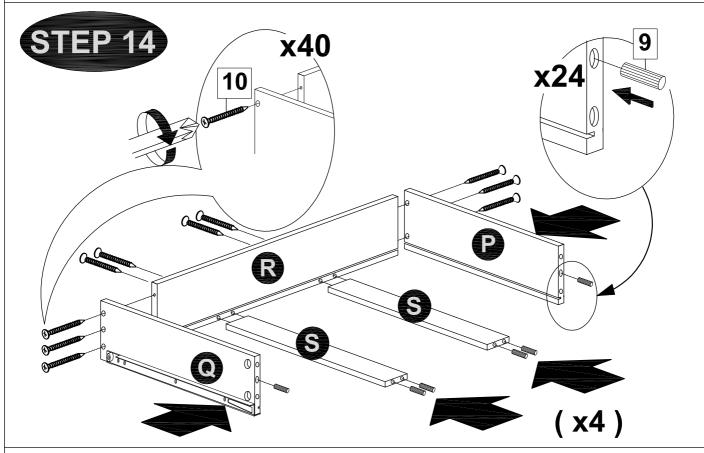


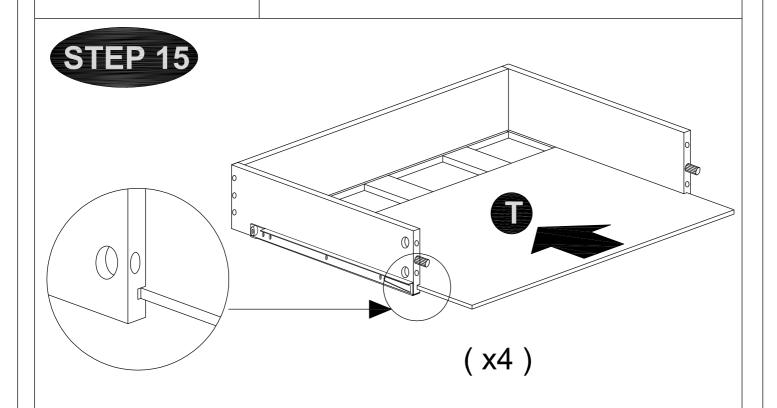


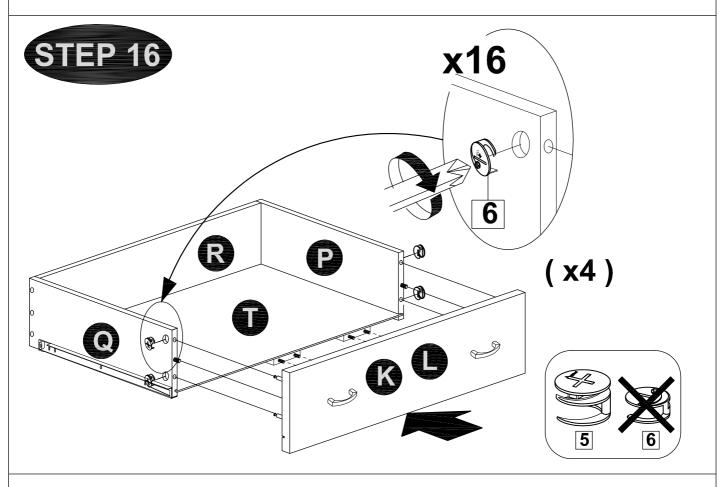


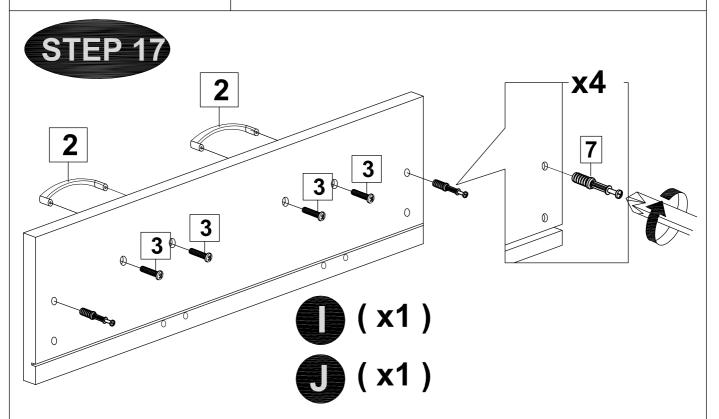

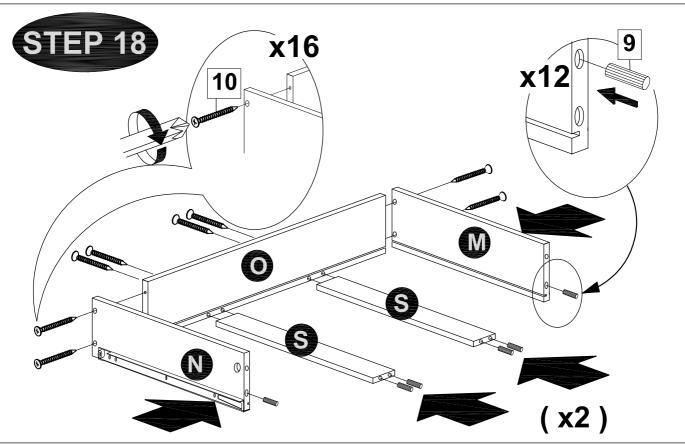

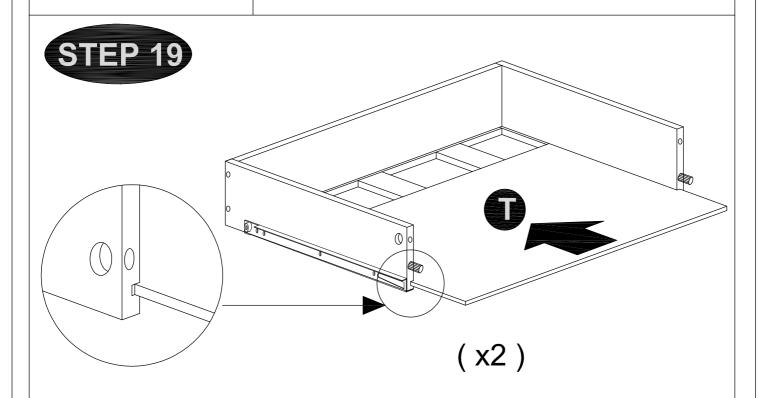

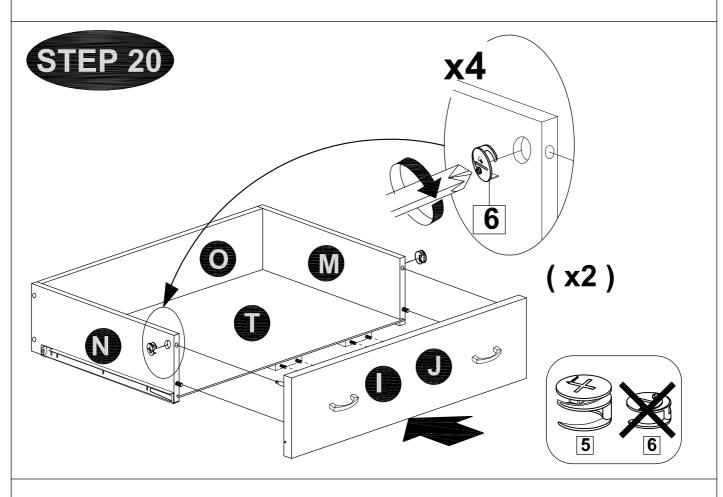

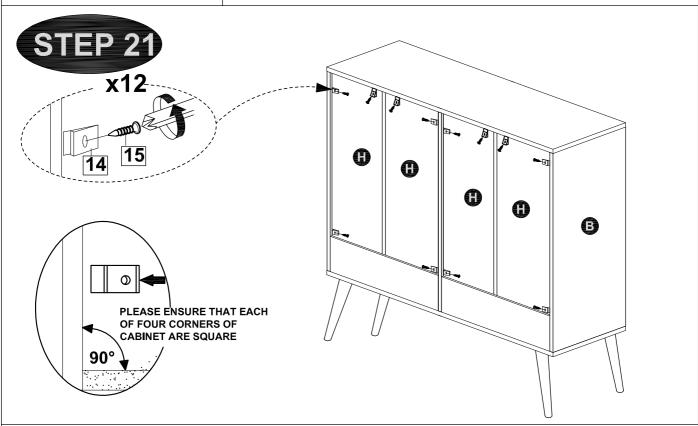








SAFETY WARNING:

It is recommended that you fit the anti-tip bracket to this item to avoid tipping and causing injury.

FITTING OF ANTI-TIP BRACKET


STEP 1:

Insert screws through bracket into pre-drilled holes in cabinet.



STEP 2 : Make a mark on


the wall through the bracket.



Drill a hole in the wall and insert the rawlplug.

STEP 3 : Insert screw through

Insert screw through bracket into hole in wall

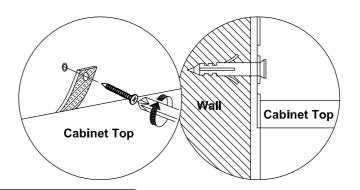

NOTE: Wall fixings are not supplied with this product as different wall materials require different types of fixing devices (such as Rawl plugs on brick work). You must use fixing devices suitable for the type of wall you intend to mount this product to.Please ensure that the head of any screw used has a diameter greater that the diameter of the mounting hole on the bracket and that the fixing is safe and secure before use.

The screw supplied is to fix the anti-tip strap to the cabinet.

HARDWARE LIST



Anti-Tip Strap - 2pcs



M4 x 16MM - 2pcs