

## ASSEMBLY INSTRUCTION


ITEM NO.: 8062-CT

THANK YOU FOR PURCHASING THIS QUALITY PRODUCT.

BE SURE TO CHECK ALL PACKING MATERIAL CAREFULLY FOR SMALL PARTS THAT MAY HAVE COME LOOSE INSIDE THE CARTON DURING TRANSIT.


## Step1:

Place the extenstion top(B) on the lower pillar, and fasthen them for 80% tight with screw (a) by #5 allen key (b). Then revolve them a little bit.

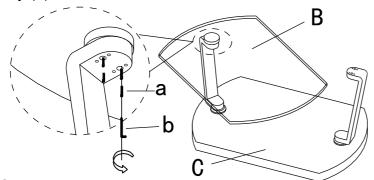

Step 2:

Place the top(A) on the other pillar, and fasthen them for 80% tight with screw (a) by #5 allen key (b).

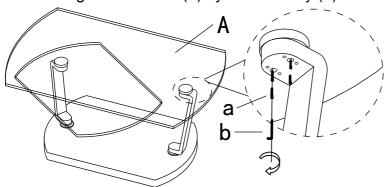

Part List


NO	DESC	SKETCH	QTY
A	Тор	0	1pc
В	Extension	0	1pc
С	Base		1pc

Hardware list

NO	DESC	SKETCH	QTY
а	Screw	**	4 pcs
b	#5 Allen Key		1 pc
С	#3 Allen Key		1 pc

Step 3:

Close the two glass tops and confirm them are align and level, then fasthen all screws (a).

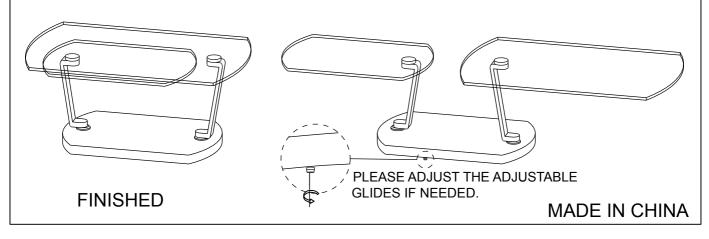



ASSEMBLY INSTRUCTION

ITEM NO.: 8062-CT

## ADJUSTMENT INSTRUCTION

If the glass are not level, please follow the INSTRUCTION as below to adjust the glass:

- 1. Use allen key(b) to loose the screw (a) about 20%.
- 2. Then use #3 allen key(c) to adjust the adjustable screws which pre-fasthened inside the pillars. The more the adjustable screws in, the more the matching corner of the glass will be raised up. Adjust the 4 adjustable screws on each pillar to level the both glass tops.
- 3. Then confirm the two glass tops are align and level, then fasthen all screws (a) tightly.

