


ASSEMBLY INSTRUCTIONS

EEI-5298

V1.03.22.21

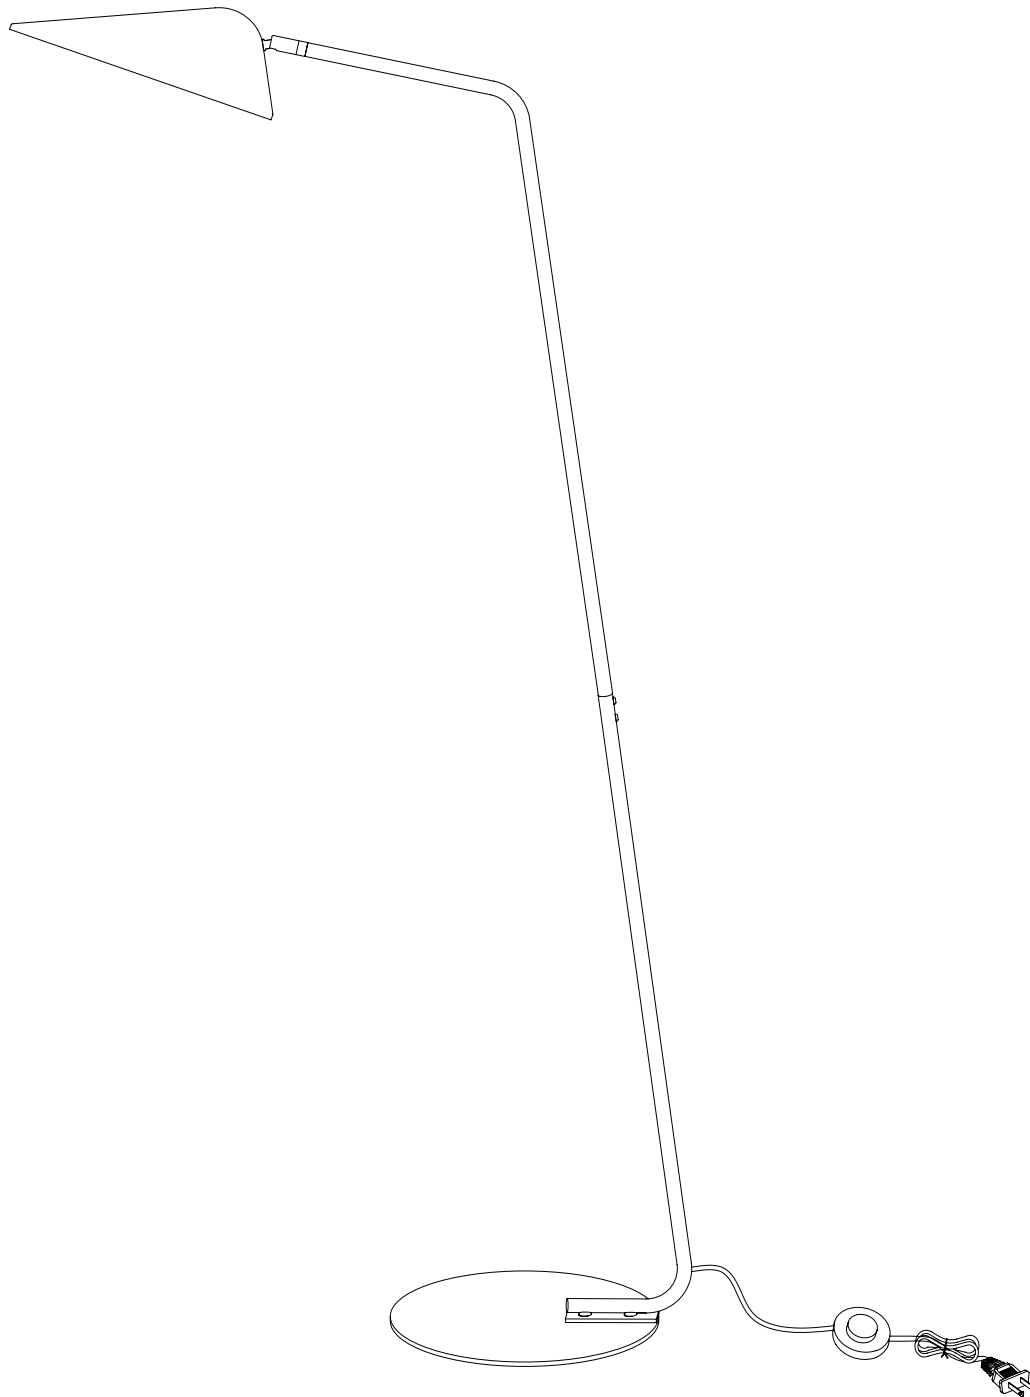

Questions? Contact us!







609.256.9000 • cs@modway.com
www.modway.com

*modway

Let's get started!

*modway

Hardware included in the box:

A		Inner Hexagon Screw +1 Spare Included	x1
B		2MM Allen Key	x1
C		Short Screw	x2
D		Countersunk Screw	x2
E		2.5MM Allen Key	x1
F		Washer Plate	x1

What you need:

1  Phillips Head Screwdriver

You may also need:

+ One (1) E26 (medium-base) Light Bulb (MAX. 60W)



Missing parts or hardware? Need assistance?

Contact us before returning your item.

We're here to help!

609.256.9000 • cs@modway.com

CONNECT WITH US!



Tag us [@modway_furniture](#) and [#modway](#) for a chance to be featured.

Before you begin, here are some things to keep in mind:

Read through all of the instructions before starting. Make sure you have all parts and components before discarding any packing materials.

Do not over-tighten screws and bolts to avoid stripping the hardware or cracking the item.

Assemble your item on a flat, carpeted area, with plenty of space to work. This will prevent damage and scratches to your floors or the item while you're assembling the product.

Keep all components and packaging out of reach of children or animals to avoid risk of choking or suffocation.

Check all parts and hardware for damage. If the product is damaged, it should not be used.

We recommend LED bulbs. LEDs are better for energy consumption and can prolong the life of the fixture.

Allow the fixture to cool before changing the bulb. Fixture may get hot when in use.


CARING FOR YOUR ITEM

Indoor use only.

Clean using a non-abrasive cloth and a mild cleaner.

Never use harsh chemicals, as they could damage the finish or integrity of the item.

*modway

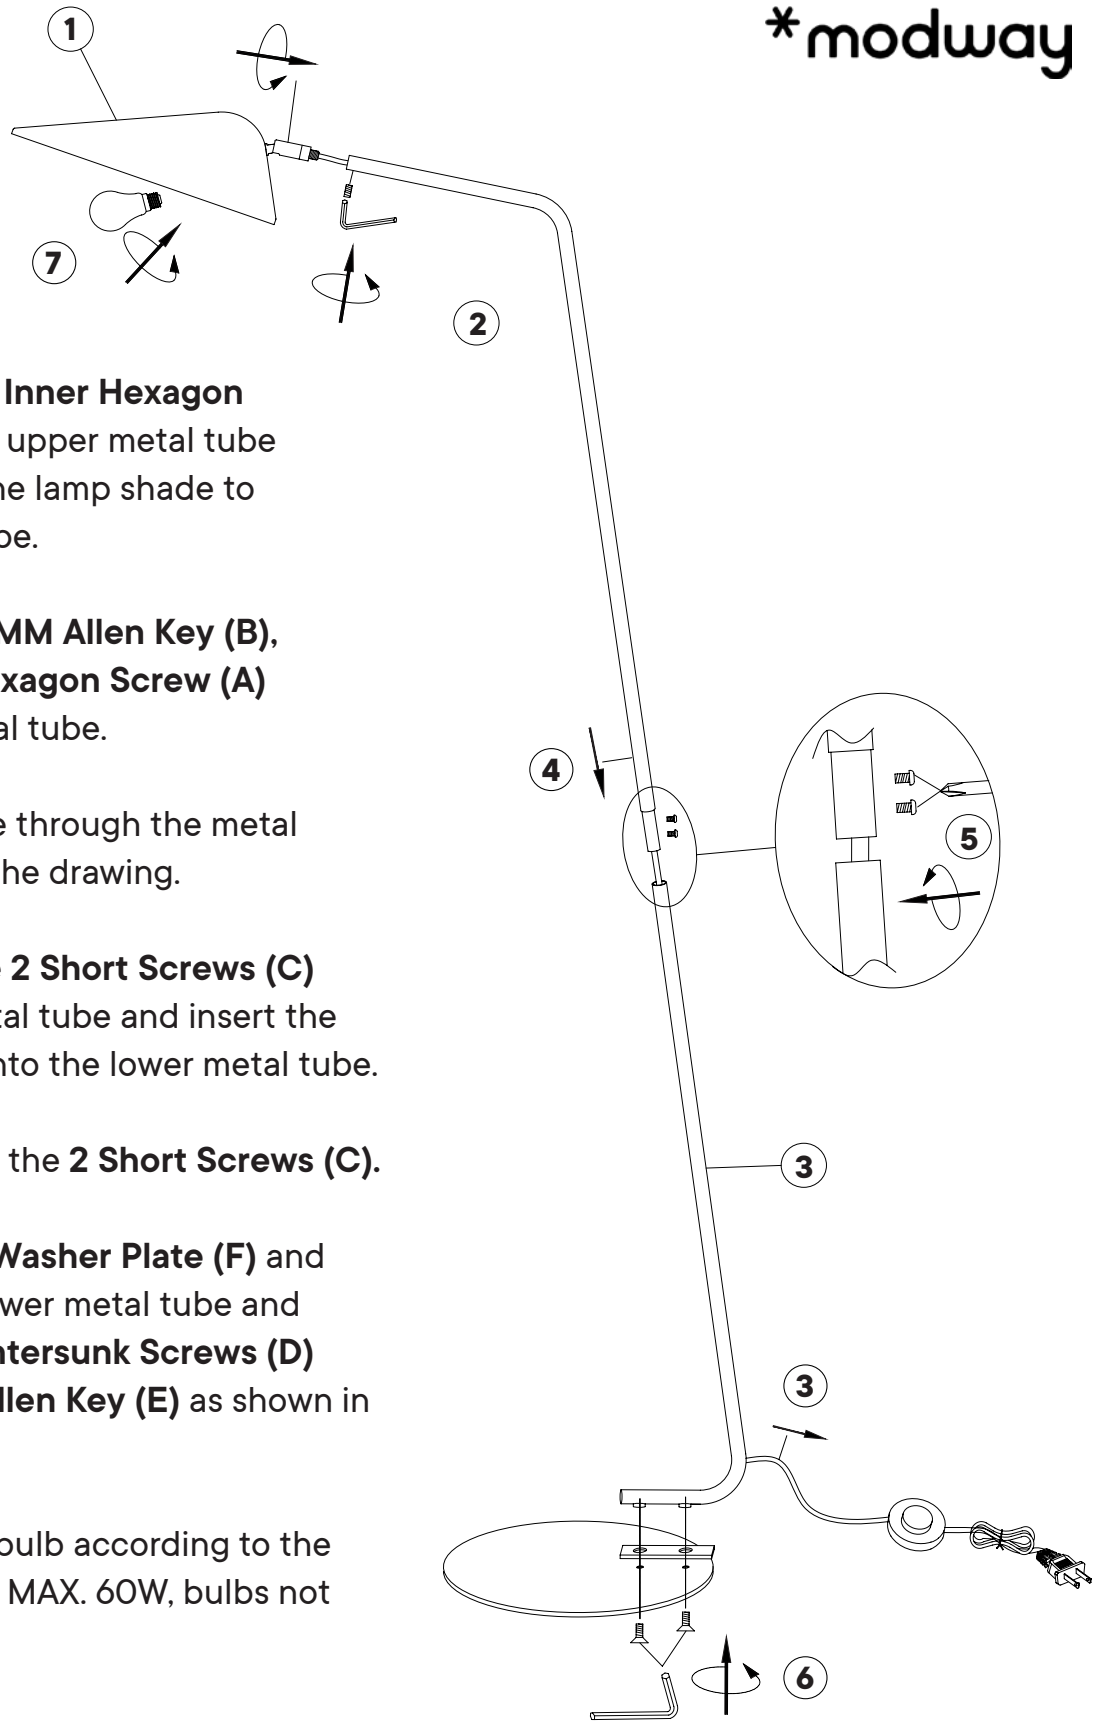

Step 1 Remove the **Inner Hexagon Screw (A)** from the upper metal tube and firmly attach the lamp shade to the upper metal tube.

Step 2 Using the **2MM Allen Key (B)**, screw the **Inner Hexagon Screw (A)** into the upper metal tube.

Step 3 Pull the wire through the metal tubes as shown in the drawing.

Step 4 Remove the **2 Short Screws (C)** from the upper metal tube and insert the upper metal tube into the lower metal tube.

Step 5 Secure with the **2 Short Screws (C)**.

Step 6 Attach the **Washer Plate (F)** and lamp base to the lower metal tube and secure with **2 Countersunk Screws (D)** using the **2.5MM Allen Key (E)** as shown in the drawing.

Step 7 Install light bulb according to the wattage label (E26, MAX. 60W, bulbs not included).

ATTENTION: To avoid the risk of fire, do not exceed the recommended wattage indicated on the wattage label.