


Furniture of America[®]

Assembly Instructions

CM1027GR/BG-1/2

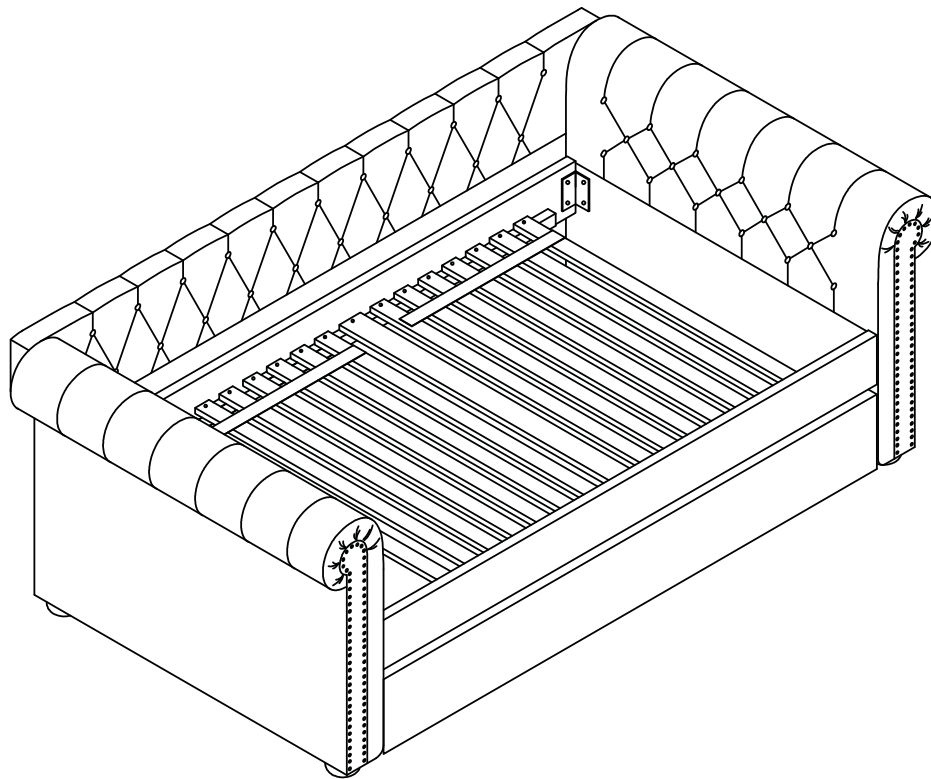

ASSEMBLY RATING

The Assembly Rating is a 5-point system that shows the degree of effort needed in assembling a specific product (with 1 being easy and 5 being difficult). For some products, two persons are recommended.


EASY



DIFFICULT

Tools Required For Assembly:

Allen Wrench




(Included)

Phillips Screwdriver



(Not Included)




2 PERSONS RECOMMENDED

ASSEMBLY & CARE ADVICE

FOR YOUR FURNITURE TO LAST, CORRECT ASSEMBLY AND PROPER MAINTENANCE ARE NECESSARY. PLEASE FOLLOW THE INFORMATION PROVIDED BELOW TO FULLY ENJOY YOUR FURNITURE.

BASIC ASSEMBLY TECHNIQUES

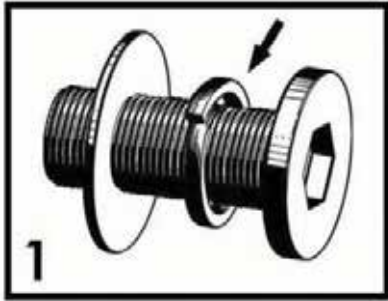


1 When lock or spring washer is used in an assembly, please make sure the lock or spring washer is placed between the larger flat washer and the head of the screw or bolt.




2 Position each part correctly and insert screws or bolts into their respective holes by hand tighten or using the proper hand tool. Only tighten when step is completed or when instructed to do so.




3 Use cardboard or carpet area when assembling furniture to prevent scratches. Make sure the furniture rests on a flat and level surface with each leg evenly touching the floor.

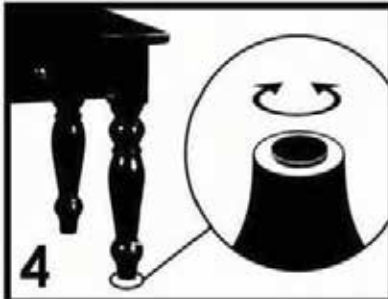

4 Some furniture comes with height adjustment knobs underneath each leg. To lower or to raise each leg, you need to turn clockwise or counterclockwise, respectively.

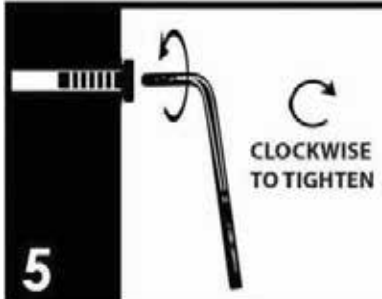


5 Make sure all parts are properly aligned, then use the appropriate hand tool to completely tighten the bolts or screws. Do not use power tools and do not overtighten.

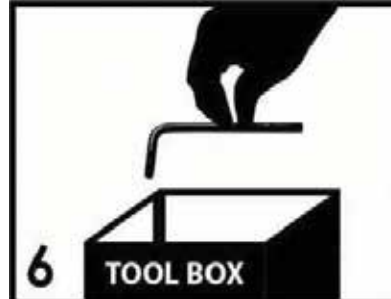

6 Save the instructions and store the Allen wrench or any supplied tool for later maintenance. After two weeks, check and tighten any loose hardware and repeat again every six months thereafter.

IT IS THE USER'S RESPONSIBILITY TO MAINTAIN THE FURNITURE. THE HARDWARE MAY LOOSEN OVER TIME AND MAY CAUSE THE FURNITURE TO BE WOBBLY AND UNABLE TO SUPPORT ITS INTENDED WEIGHT CAPACITY. THIS MAY LEAD TO COLLAPSE AND MAY CAUSE SERIOUS INJURY.




FAILURE TO FOLLOW THE GUIDELINES ABOVE MAY RESULT IN INJURY AND/OR PROPERTY DAMAGE.




Before you begin, please read Page 2 of "Assembly and Care Advice".

And remember, do not tighten until each step is completed or instructed.


Parts List




#1 x 1pc
Left Arm



#2 x 1pc
Right Arm



#3 x 1pc
Back Rest




#4 x 2set
Slats For Daybed



#5 x 1pc
Back Rail



#6 x 1pc
Front Rail



#7 x 1pc
Middle Slat

Hardware List



#A x 4pcs
L-iron 90*45*3.0T mm



#B x 1pc
Allen Wrench M5



#C x 20pcs
Lock Washer Ø12 mm



#D x 20pcs
Flat Washer Ø22 mm



#E x 8pcs
Bolt 5/16"*1-1/2"



#F x 8pcs
Bolt 5/16"*3/4"



#G x 4pcs
Bolt 5/16"*3"



#H x 30pcs
Screw M8*1-1/4"




#1


1a. Prepare 8 bolt assemblies by first inserting a lock washer (#C) onto the bolt (#F) then a flat washer (#D) onto that same bolt (#F).

1b. Prepare 8 bolt assemblies by first inserting a lock washer (#C) onto the bolt (#E) then a flat washer (#D) onto that same bolt (#E).

- #A x 4pcs
- #C x 16pcs
- #D x 16pcs
- #E x 8pcs
- #F x 8pcs

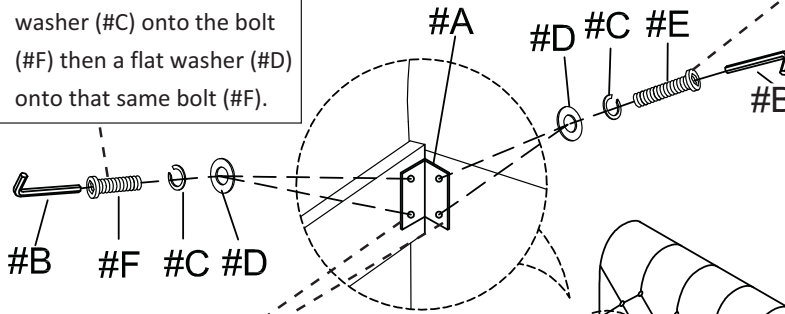

2. Align the back rail (#5) and front rail (#6) to the left and right arms (#1,2). Then align an L-iron (#A) to each corner. Insert the bolt assemblies (#E) into the holes along the arms (#2,3) and insert the bolt assemblies (#F) into the holes along the rails (#5,6). Secure all bolts using the Allen wrench (#B).

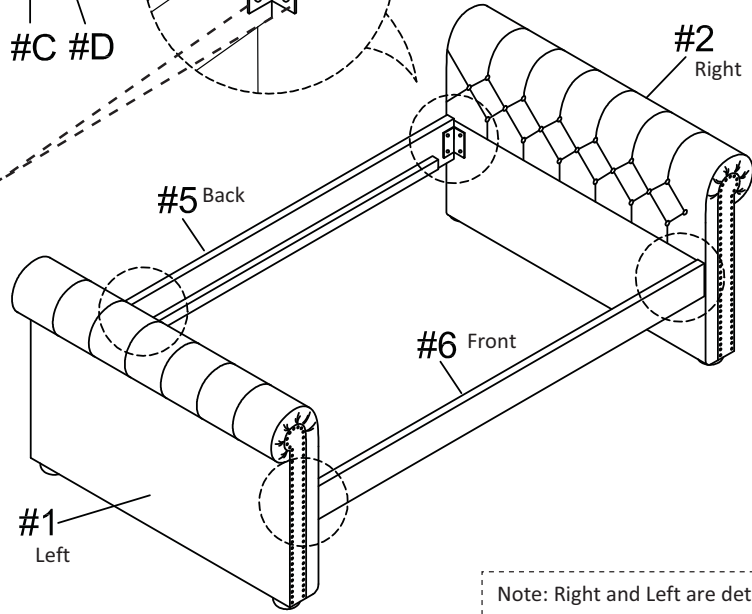


Note: Right and Left are determined by facing the front of the daybed in its upright position.




#2


- #C x 4pcs
- #D x 4pcs
- #G x 4pcs

1. Prepare 4 bolt assemblies by first inserting a lock washer (#C) onto the bolt (#G) then a flat washer (#D) onto that same bolt (#G).

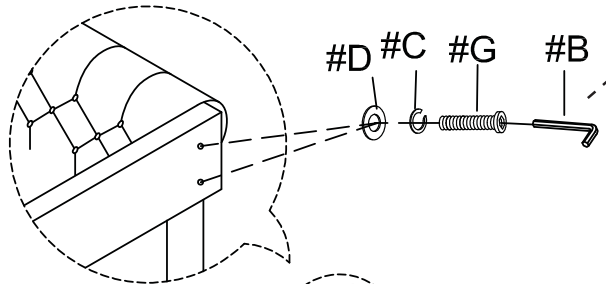


2. Align the backrest (#3) to the holes along the back of the right and left arms (#2,3), then insert 2 bolts into each end and secure using the Allen wrench (#B).

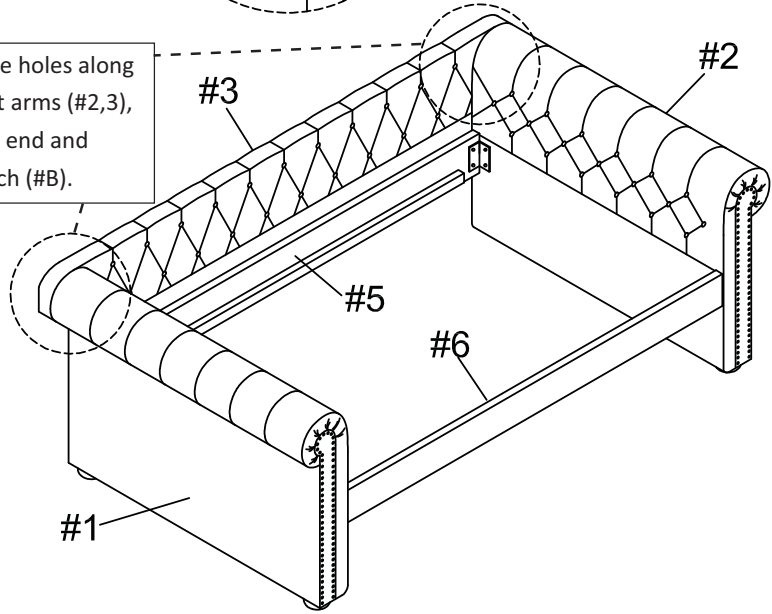


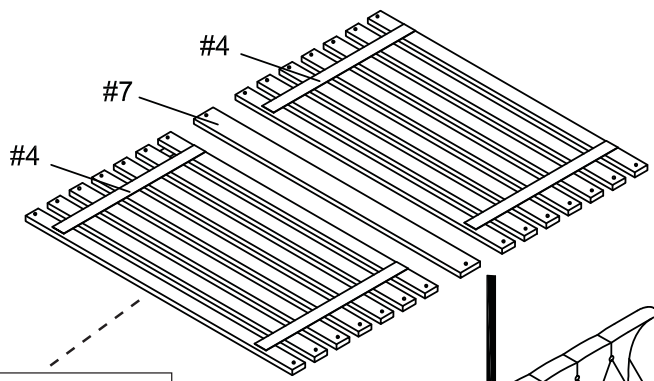


Place the slats (#4) onto the outer ends of the rails and the middle slat (#7) onto the center of the slats.

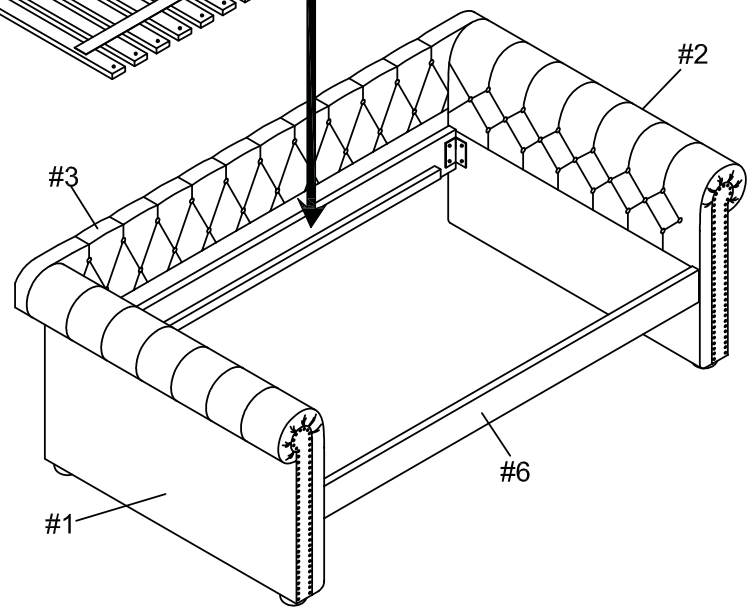

#H x 30pcs

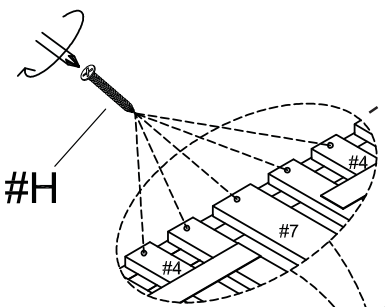

Insert a screw (#H) into each end of the slats and secure using a Phillips screwdriver.





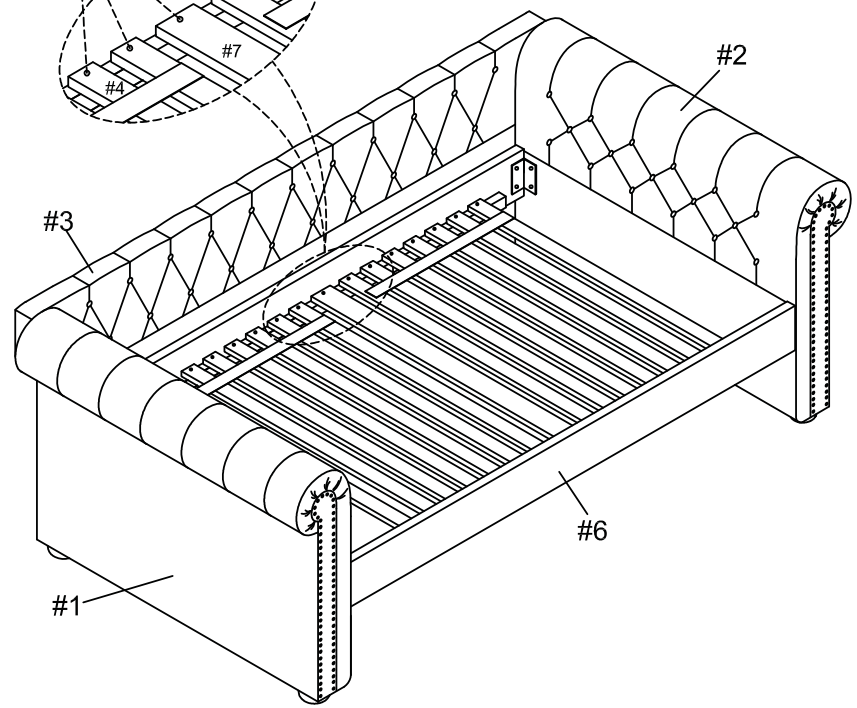










Before you begin, please read Page 2 of "Assembly and Care Advice".

And remember, do not tighten until each step is completed or instructed.

Parts List


-  #1 x 1pc
Trundle Front Panel
-  #2 x 1pc
Trundle Back Panel
-  #3 x 2pcs
Left & Right Panel
-  #4 x 2set
Slats For Daybed
-  #5 x 1pc
Middle Slat

Hardware List

-  #A x 4pcs
L-iron 130*45*3.0T mm
-  #B x 1pc
Allen Wrench M5
-  #C x 16pcs
Lock Washer Ø12 mm
-  #D x 16pcs
Flat Washer Ø22 mm
-  #E x 16pcs
Bolt 5/16"*3/4"
-  #F x 30pcs
Screw M8*1-1/4"




#A x 4pcs
 #C x 16pcs
 #D x 16pcs
 #E x 16pcs

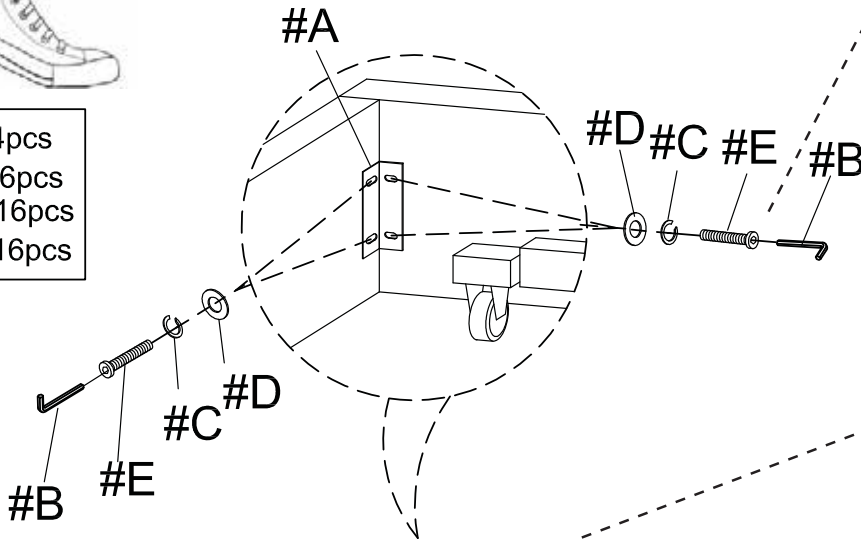

1. Prepare 8 bolt assemblies by first inserting a lock washer (#C) onto the bolt (#E) then a flat washer (#D) onto that same bolt (#E).


2. Align the left and right panels (#3) to the front and back trundle panels (#1,2). Then align an L-iron (#A) to each corner. Insert 2 bolt assemblies into each corner and secure using the Allen wrench (#B).

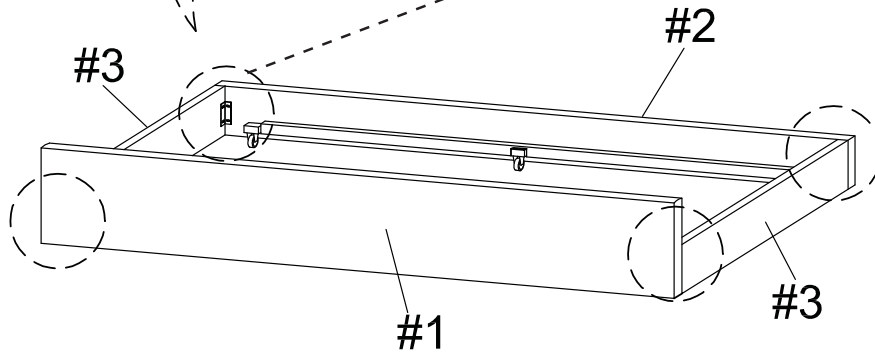

Note: Right and Left are determined by facing the front of the trundle in its upright position.






Place the slats (#4) onto the outer ends of the panels and the middle slat (#5) onto the center of the panels.

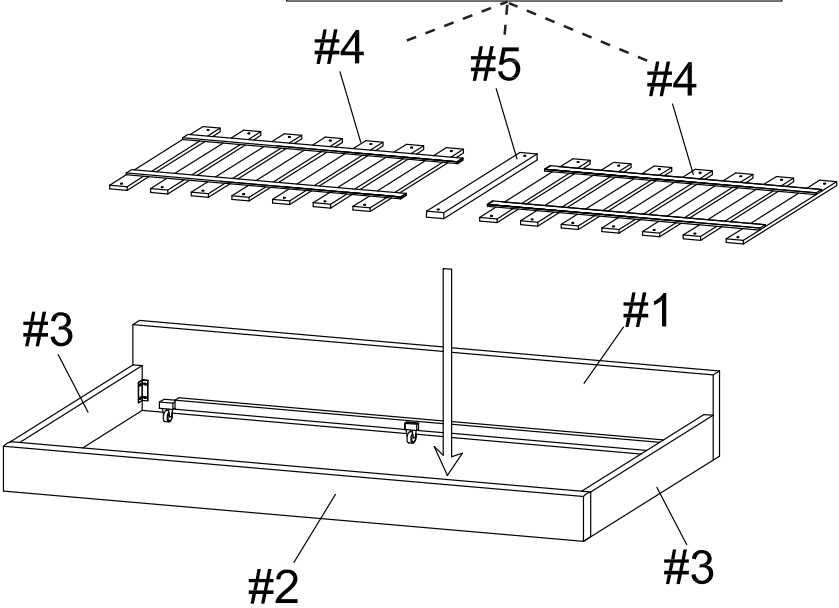



#F x 30pcs

Insert a screw (#F) into each end of the slats and secure using a Phillips screwdriver.

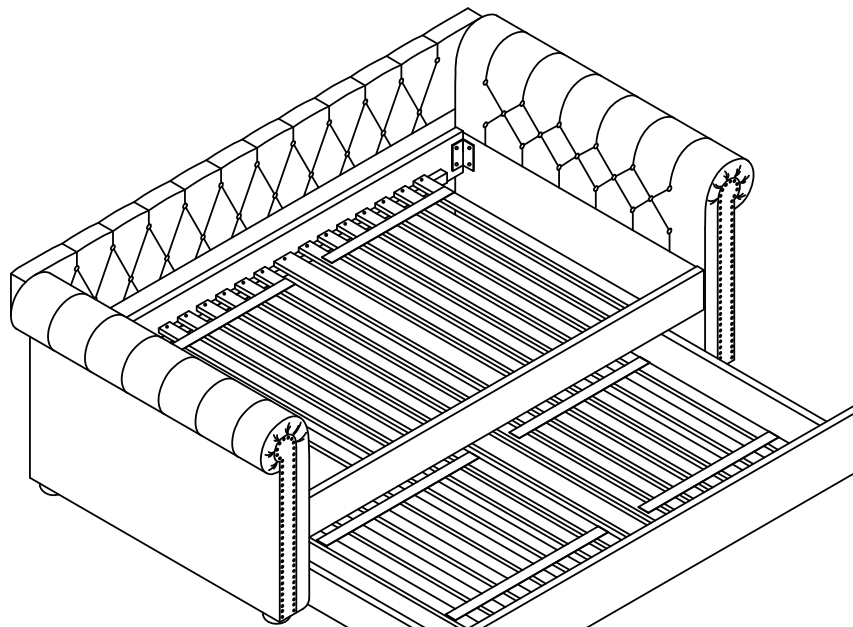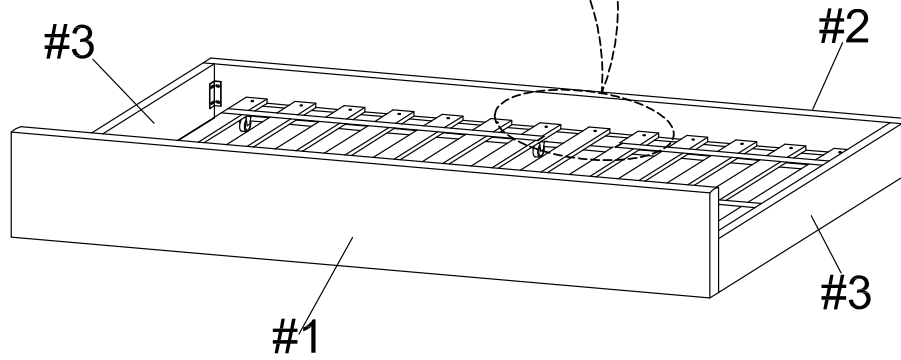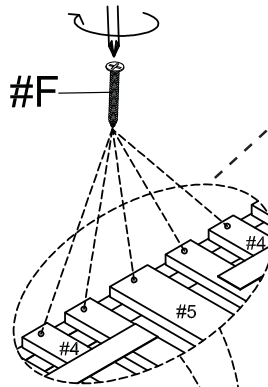

Insert the trundle into the bottom part of the daybed.

ASSEMBLY IS COMPLETED