






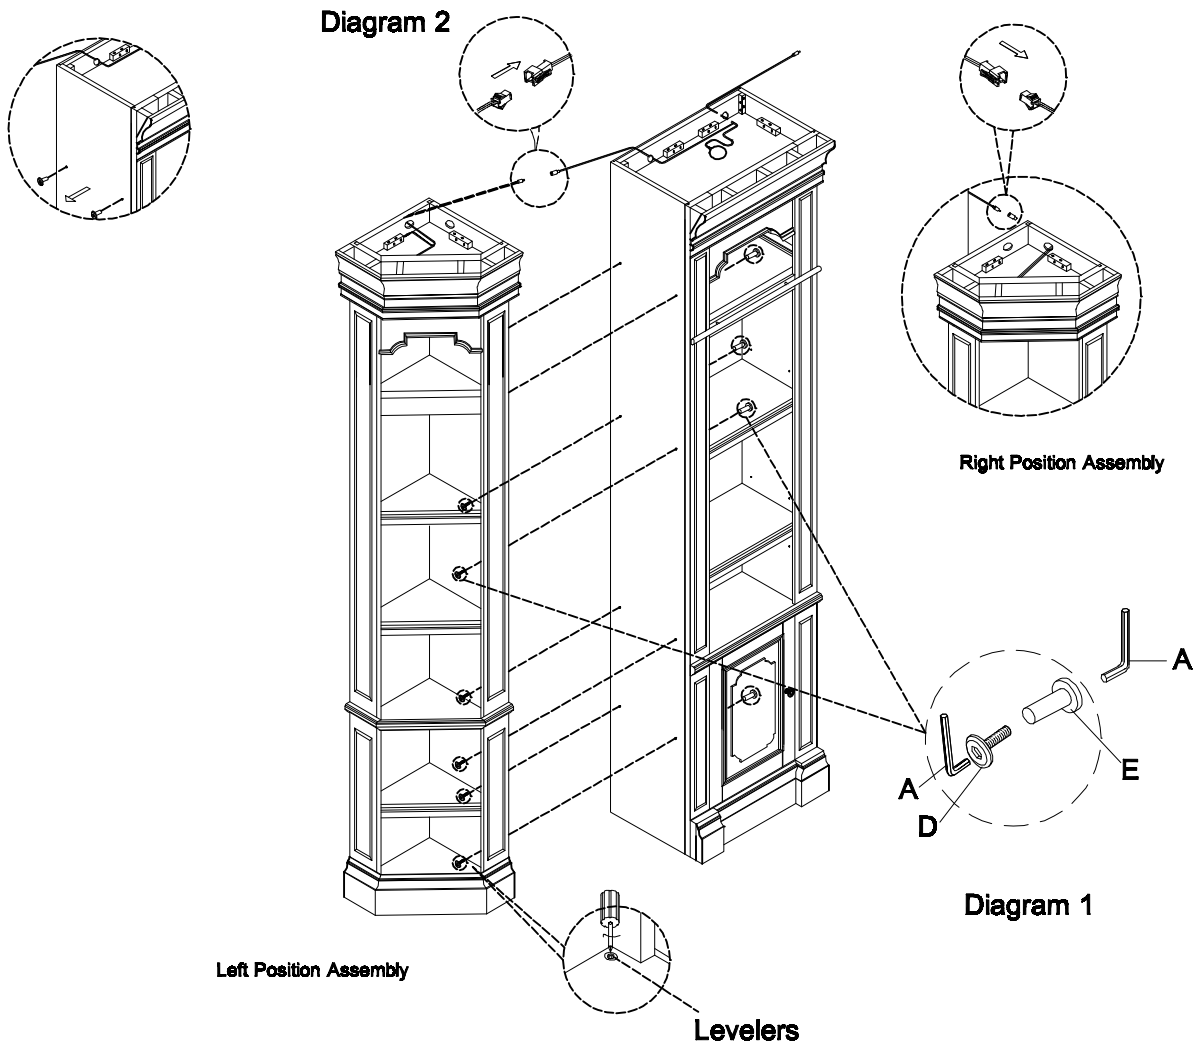


# Assembly Instruction

## Item NO:PRO#450

NO	Description	Sketch	Q'TY
A	Allen Wrench 4mm		1
B	Touch up Pen		2
C	Wall Strap		1
D	Connector Bolt Ø1/4**1"		8
E	Connector Cap Ø1/4**5/8"		8
F	Wire buckle		2
G	Screw M6*3/8"		2



1. Align and connect corner to cabinet with Connector Bolt D and Connector Cap E.

2. Connect female and male airjack light cable to properly ensure power to all LED lights. See Diagram 2.  
Connect light Kit LTKIT#499 (sold separately) to right most cabinet by connecting remaining air jack cable to Control Box and securing Touch Cable to touch post located in front right corner of cabinet top. See assembly instruction sheet provided with LTKIT#499 for more details.

**For your safety,once wall is fully assembled,always secure to wall Wall Strap C.**