













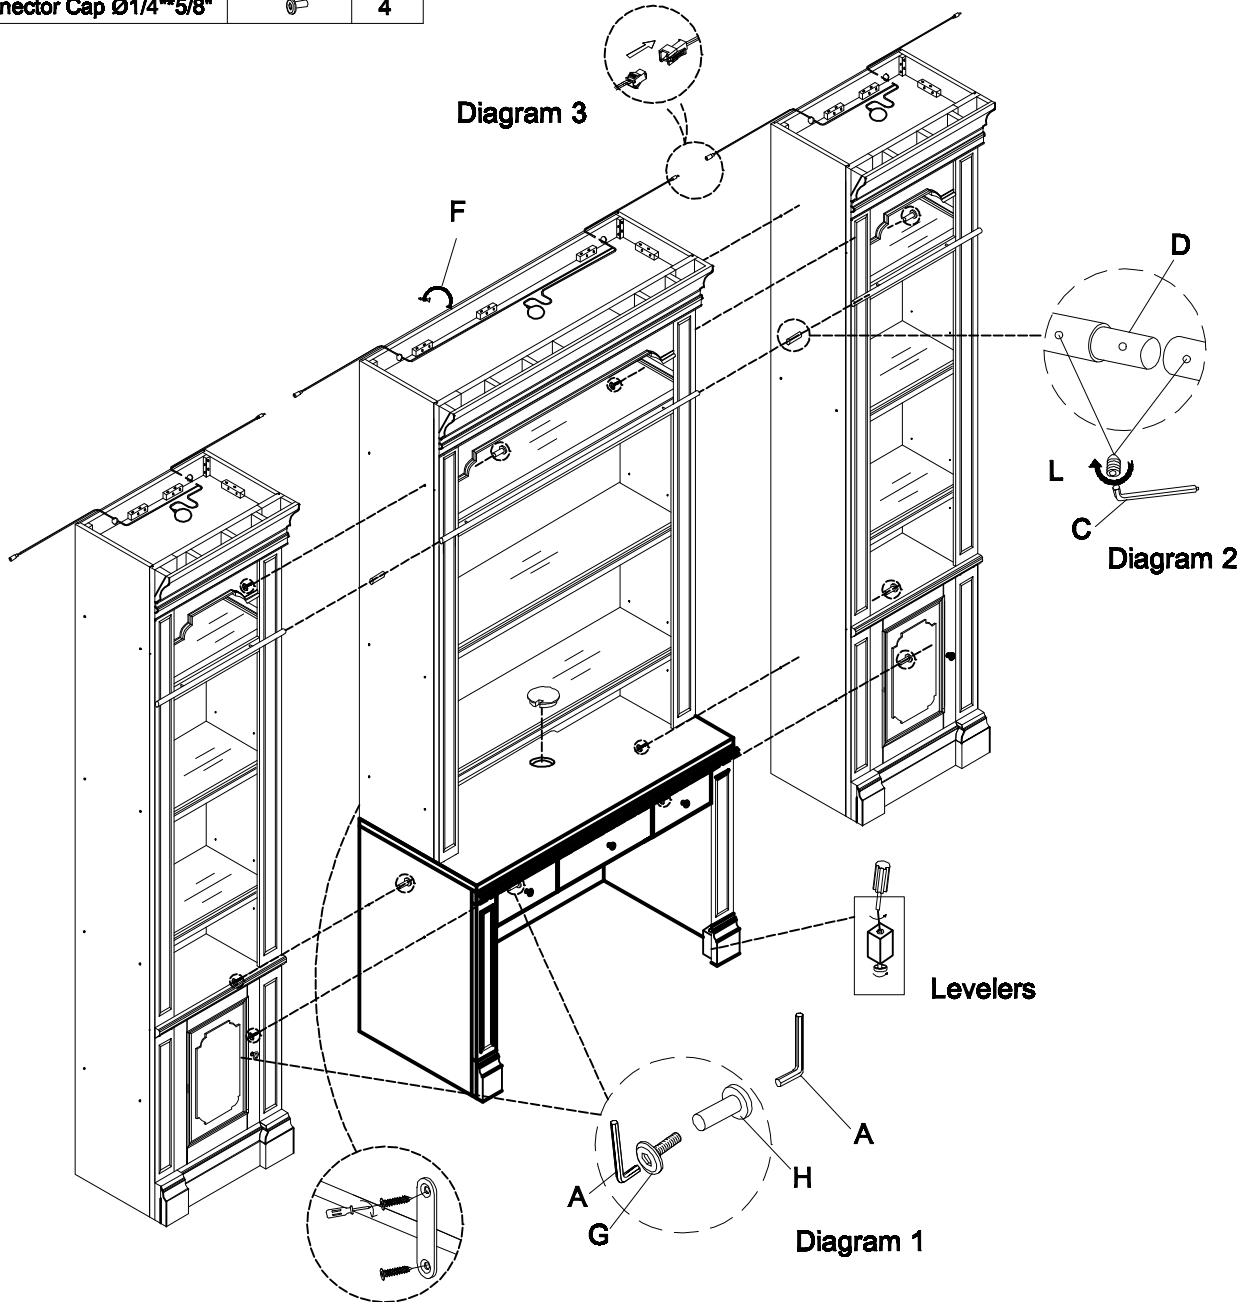


# Assembly Instruction

## Item NO:PRO#460H/461D

NO	Description	Sketch	Q'TY	NO	Description	Sketch	Q'TY
A	Allen Wrench 4mm		1	I	Bolt Ø1/4**1-5/8"		2
B	Touch up Pen		2	J	Decoration Bolt Cap		2
C	Allen Wrench 2.5mm		1	K	Allen Wrench 4mm For Electric Drill		1
D	Ladder Rail Coupler		1	L	Connector Bolt Ø2.5mm		2
E	Ladder Rail Finial		2	M	Wire buckle		2
F	Wall Strap		1	N	Screw M6*3/8"		2
G	Connector Bolt Ø1/4**1"		4				
H	Connector Cap Ø1/4**5/8"		4				



1. Align and connect cabinets with Connector Bolt G and Connector Cap H. See Diagram 1.

2. To connect ladder rails, loosen retaining screw found on each rail end, insert ladder rail coupler D about 1" on one side, and tighten. Align cabinets and push together, aligning ladder rail in the process. Tighten opposite retaining screw to secure ladder rail coupler. See Diagram 2.

3. Connect female and male airjack light cable to properly ensure power to all LED lights. See Diagram 3.

Connect light Kit LTKIT#499 (sold separately) to right most cabinet by connecting remaining air jack cable to Control Box and securing Touch Cable to touch post located in front right corner of cabinet top. See assembly instruction sheet provided with LTKIT#499 for more details.

**For your safety, once wall is fully assembled, always secure to wall Wall Strap F.**